


SPECIFICATIONS

Material:	BK7
Surface Flatness:	< /10 @ 633nm
Surface Quality:	< 10/5
Diameter Tolerance:	+0.00 / -0.25mm
Thickness Tolerance:	±0.25mm
Centering Error:	< 3 arcmin
Focal Length Tolerance:	±0.5%
Bevel:	0.35mm FW @ 45°
Clear Aperture:	> 90% of diameter

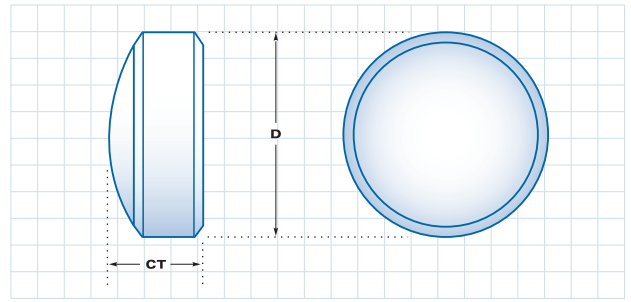

	P A R T N U M B E R				
	FL	FL	D	ROC	CT
	633nm	1064nm	(All units in mm)		
LPX-10.0-25-B	25	25.4	10.0	12.9	3.0
LPX-12.7-25-B	25	25.4	12.7	12.9	4.0
LPX-19.0-25-B	25	25.4	19.0	12.9	6.3
LPX-25.4-25-B	25	25.4	25.4	12.9	12.7
LPX-12.7-35-B	35	35.5	12.7	18.0	3.5
LPX-19.0-35-B	35	35.5	19.0	18.0	5.0
LPX-25.4-35-B	35	35.5	25.4	18.0	7.5
LPX-10.0-50-B	50	50.9	10.0	25.8	3.0
LPX-12.7-50-B	50	50.9	12.7	25.8	3.0
LPX-19.0-50-B	50	50.9	19.0	25.8	4.5
LPX-25.4-50-B	50	50.9	25.4	25.8	6.3
LPX-12.7-60-B	60	60.9	12.7	30.9	3.0
LPX-19.0-60-B	60	60.9	19.0	30.9	4.0
LPX-25.4-60-B	60	60.9	25.4	30.9	6.3
LPX-10.0-75-B	75	76.1	10.0	38.6	3.0
LPX-12.7-75-B	75	76.1	12.7	38.6	3.0
LPX-19.0-75-B	75	76.1	19.0	38.6	4.0
LPX-25.4-75-B	75	76.1	25.4	38.6	5.0
LPX-38.1-75-B	75	76.1	38.1	38.6	7.6
LPX-10.0-100-B	100	101.6	10.0	51.5	3.0
LPX-12.7-100-B	100	101.6	12.7	51.5	3.0
LPX-19.0-100-B	100	101.6	19.0	51.5	4.0
LPX-25.4-100-B	100	101.6	25.4	51.5	4.5
LPX-38.1-100-B	100	101.6	38.1	51.5	6.3
LPX-50.8-100-B	100	101.6	50.8	51.5	10.0
LPX-12.7-125-B	125	127.0	12.7	64.4	3.0
LPX-25.4-125-B	125	127.0	25.4	64.4	4.5
LPX-50.8-125-B	125	127.0	50.8	64.4	8.0
LPX-12.7-150-B	150	152.5	12.7	77.3	3.0
LPX-25.4-150-B	150	152.5	25.4	77.3	4.0
LPX-38.1-150-B	150	152.5	38.1	77.3	5.0
LPX-50.8-150-B	150	152.5	50.8	77.3	7.6
LPX-12.7-200-B	200	203.2	12.7	103.0	3.0
LPX-25.4-200-B	200	203.2	25.4	103.0	4.0
LPX-38.1-200-B	200	203.2	38.1	103.0	5.0
LPX-50.8-200-B	200	203.2	50.8	103.0	6.3
LPX-12.7-250-B	250	254.0	12.7	128.8	3.0
LPX-25.4-250-B	250	254.0	25.4	128.8	4.0
LPX-38.1-250-B	250	254.0	38.1	128.8	5.0
LPX-50.8-250-B	250	254.0	50.8	128.8	6.3

	P A R T N U M B E R				
	FL	FL	D	ROC	CT
	266nm	1064nm	(All units in mm)		
LPX-25.4-350-B	350	355.6	25.4	180.3	4.0
LPX-50.8-350-B	350	355.6	50.8	180.3	6.3
LPX-25.4-400-B	400	406.3	25.4	206.0	4.0
LPX-50.8-400-B	400	406.3	50.8	206.0	5.0
LPX-12.7-500-B	500	507.9	12.7	257.5	3.0
LPX-25.4-500-B	500	507.9	25.4	257.5	4.0
LPX-38.1-500-B	500	507.9	38.1	257.5	5.0
LPX-50.8-500-B	500	507.9	50.8	257.5	6.3
LPX-25.4-600-B	600	609.5	25.4	309.0	4.0
LPX-50.8-600-B	600	609.5	50.8	309.0	6.3
LPX-12.7-750-B	750	761.9	12.7	386.3	3.0
LPX-25.4-750-B	750	761.9	25.4	386.3	4.0
LPX-38.1-750-B	750	761.9	38.1	386.3	5.0
LPX-50.8-750-B	750	761.9	50.8	386.3	6.3
LPX-25.4-800-B	800	812.6	25.4	412.0	4.0
LPX-50.8-800-B	800	812.6	50.8	412.0	6.3
LPX-25.4-900-B	900	914.2	25.4	463.5	4.0
LPX-50.8-900-B	900	914.2	50.8	463.5	6.3
LPX-12.7-1000-B	1000	1015.8	12.7	515.0	3.0
LPX-25.4-1000-B	1000	1015.8	25.4	515.0	4.0
LPX-38.1-1000-B	1000	1015.8	38.1	515.0	5.0
LPX-50.8-1000-B	1000	1015.8	50.8	515.0	6.3
LPX-12.7-2000-B	2000	2031.6	12.7	1030.0	3.0
LPX-25.4-2000-B	2000	2031.6	25.4	1030.0	4.0
LPX-50.8-2000-B	2000	2031.6	50.8	1030.0	6.3
LPX-12.7-3000-B	3000	3047.3	12.7	1545.0	3.0
LPX-25.4-3000-B	3000	3047.3	25.4	1545.0	4.0
LPX-50.8-3000-B	3000	3047.3	50.8	1545.0	6.3
LPX-12.7-4000-B	4000	4063.1	12.7	2060.0	3.0
LPX-25.4-4000-B	4000	4063.1	25.4	2060.0	4.0
LPX-50.8-4000-B	4000	4063.1	50.8	2060.0	6.3
LPX-12.7-5000-B	5000	5078.9	12.7	2575.0	3.0
LPX-25.4-5000-B	5000	5078.9	25.4	2575.0	4.0
LPX-50.8-5000-B	5000	5078.9	50.8	2575.0	6.3
LPX-12.7-7500-B	7500	7618.3	12.7	3862.5	3.0
LPX-25.4-7500-B	7500	7618.3	25.4	3862.5	4.0
LPX-50.8-7500-B	7500	7618.3	50.8	3862.5	6.3
LPX-12.7-H100-B	10000	10157.8	12.7	5150.0	3.0
LPX-25.4-H100-B	10000	10157.8	25.4	5150.0	4.0
LPX-50.8-H100-B	10000	10157.8	50.8	5150.0	6.3

ORDERING EXAMPLE:

LPX - 10.0 - 25 - B

↑ PRODUCT CODE ↑ DIAMETER ↑ FOCAL-LENGTH ↑ MATERIAL